

## Unitract™ Series

For 3/8" and 1/2" Hose I.D.

**Unitract™ Series Low Pressure reels** are ideally suited for plant maintenance or many other industrial functions where hose storage is a problem. Standard hose for air, water and oxygen/acetylene applications. Hose can be dispensed and retracted with greater ease and expedience than coiling by hand. The Unitract™ series fits easily into height restricted areas, and is a lighter duty reel. Designed for stationary applications; do not use on mobile applications.

**Product Name:**

Hosetract Unitract™ Low Pressure

**Manufacturer:**

Hosetract Industries Inc.  
6433 Discount Drive  
Fort Wayne, IN 46818  
www.hosetract.com

**Swivel:**



Standard: Carbon Steel zinc coated

**Features:**

- Safety banded spring in sealed in springcase
- Weighs 10 lbs. less than C Series
- Guide arm can be adjusted to 8 Positions
- Minimal size envelope permits installation where space is a factor
- Simple design incorporates fewer parts
- Heavy gauge base with no welds
- Reels shipped standard from hose payout position.
- Powder coat finish
- Nonsparking latch mechanism



Inlet - 1/2" FPT  
Max. Temp. - 200°F

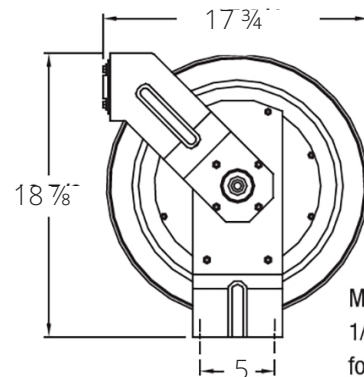

Mounting Slots  
1/2" wide x 3/4" deep  
for max 7/16" dia. bolt

Standard front  
hose payout position

# Unitract™ Series

For 3/8" and 1/2" Hose I.D.

## UTL SERIES

### Models without hose and hose stop

Model #	Weight	PSI	Hose Capacity ID	Hose Capacity ft	Reel Inlet	Reel Outlet
UTL-300	36	1000	3/8"	50'	1/2" NPT (F)	1/2" NPT (F)
UTL-500	36	1000	1/2"	50'	1/2" NPT (F)	1/2" NPT (F)

### Models with hose and hose stop

Model #	Weight	PSI	Hose ID	Hose Length ft	Reel Inlet	Reel Outlet
UTL-350	44	300	3/8"	50'	1/2" NPT (F)	1/4" NPT (M)*
UTL-550	47	300	1/2"	50'	1/2" NPT (F)	1/2" NPT (M)*

\*Can be furnished with different sizes upon request.

## ACCESSORIES:

### Hose Stop Assemblies



1234A - 1/4"



1233A - 3/8"



1232A - 1/2"

### Mount Assemblies



1279A - I-Beam Bracket



1282A - Swivel Bracket